



# Model # 2CFO54 42 4P w/ SUPER PRESS

- Double Corn Tortilla w/ on board Flour Press baking oven
- Baking chamber: 54" long
- Production capacity: Corn 200-350 dozen per hour
   Flour 80 dozen per hour 7 to 13"
   180 dozen per hour up to 6 1/2"
- Sheeter head: 4 ½ x 15 rollers
  Tortilla Press: 16 x 18 platens
  Baking bands: 3 ea. Slat type

# Features (mechanical)

- Pre-mix combustion system
- Ribbon type burners
- Electronic variable speed control
- High temperature graphite main shaft bearings
- Spring tensioned baking bands
- 2 x 15 ½ curved baking bands
- Oversized oven roller chain on baking bands
- Heat treated sprockets throughout
- Easy access lubrication
- Independent single lever gas adjustment

#### Features (press)

- Teflon coated press plates
- Dual digital temp controls
- High efficiency cartridge heaters
- Single knob press thickness control

#### Features (sheeter)

- Corrosion resistant heavy duty bearings
- Water escape feature on bearings
- Anodized aluminum side frames
- Spring loaded rocker arm cutting mold supports

# Features (safety)

- Gas flame supervision
- · Totally enclosed fixed gear guard on sheeter
- Magnetic interlocks on sheeter hopper (prevents sheeter from operating with hopper removed)
- Magnetic interlock on table panel (prevents access to motor compartment while machine is running)
- Magnetic interlock on cutting mold guard
- Emergency stop wand for quick and easy stopping
- Emergency stop button at front of oven


# Features (others)

- Stainless steel double insulated hinged oven door panels
- · Stainless steel trim
- Double hinged hood for easy application of Teflon spray
- Easy to understand control panel
- ETL listed to NSF/ANSI Standard 4
- Made in USA


### Options


- Two on board cooling belts with exit belt
- 4 Tier Cooling Conveyor beneath oven for space savings
- Two Band front Roller to accommodate large cutting molds (up to 7 1/4)




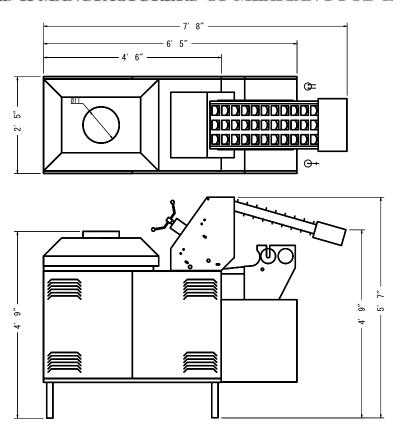

MODEL No.	PRODUCTION RATES CORN (doz/hr)	PRODUCTION RATES FLOUR (doz/hr)	OAL	EXHAUST SIZE	BTU/HR	EXHAUST CFM	ELECTRICAL REQUIREMENTS
2CFO 54 424 P	300-500	80 – 7"- 13" 180 – up to 6 1/2"	92"	11"	300,000 @ 8" WC	180	230 V 70 Amp Single Phase Hard Wire







TYPICAL FLOOR LAYOUTS

7635 SERAPIS AVE. PICO RIVERA, CALIFORNIA 90660 1(800)944-0396 (562)949-0396 FAX (562)949-0180