



# Corn, Two Row Tortilla Ovens

- Sheeter head: 8 ½ x 18 rollers
- Baking bands: 3 ea. Slat type
- Pre-mix combustion system

#### Features (mechanical)

- Ribbon type burners
- Electronic variable speed control
- High temperature main shaft bearings
- Bearing chamber protected with high temperature insulation
- Spring tensioned baking bands
- 1 ½ x 18 curved slat top and bottom belts
- 1 ½ x 18 flat slat middle belt
- 2062 oven roller chain on baking bands
- Heat treated sprockets throughout
- Easy access lubrication
- Independent manually adjusted burner mixer
- Variable blower speed for quite operation

### Features (sheeter)

- Corrosion resistant 1 15/16 heavy duty bearings
- Water escape feature on bearings
- Anodized aluminum side frames
- Spring loaded rocker arm cutting mold supports
- Tachometer
- Electronic variable speed control
- Quick lift discharge (prevents overheating of wire mesh)

# Features (safety)

- Gas flame supervision
- Electronic Ignition
- Totally enclosed fixed gear guard on sheeter
- Magnetic interlock on cutting mold guard
- Emergency stop wand for quick and easy stopping

#### Features (others)

- Overhead easy to operate control panel
- Digital temperature control
- Stainless steel double insulated hinged oven door panels
- Double wall air insulated hood
- Stainless steel trim
- Double hinged hood for easy application of Teflon spray
- ETL listed to NSF/ANSI Standard 4
- Made in USA

### **Options**


- CB 5 balance weave baking bands
- Infrared burner over top belt for chip production
- 4 Tier Cooling Conveyor beneath oven for space savings
- Rubber exit belt conveyor
- Split discharge for right angle conveyor
- Pneumatic cutting mold supports
- Two Band front roller to accommodate cutters up to 14"
- Wireless rear roller
- Atmospheric type burners
- 440 V 3 phase

## **Specs**

- 230 V 3 phase
- Natural gas (available in propane gas)


7635 SERAPIS AVE. PICO RIVERA, CALIFORNIA 90660 1(800)944-0396 (562)949-0396 FAX (562)949-0180



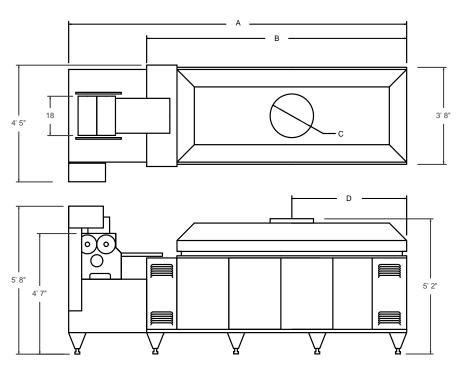

MODEL No.	PRODUCTION RATES (doz/hr)	BAKING CHAMBER "A"	OAL "B"	EXHAUST SIZE "C"	"D"	BTU/HR	EXHAUST CFM	ELECTRICAL REQUIREMENTS
2CO7 62 8P	300-600	7' - 0"	11'-4"	17"	35"	700,000	400	230V 3Ø 13 amps
2CO10 62 8P	500-900	10' - 0"	14'-4"	20"	53"	900,000	500	230V 3Ø 19 amps
2CO12 62 8P	800-1100	12' - 0"	16'-4"	22"	65"	1,050,000	600	230V 3Ø 19 amps
2CO14 62 8P	1000-1300	14' - 0"	18'-4"	24"	77"	1,200,000	750	230V 3Ø 19 amps

# TYPICAL FLOOR LAYOUTS

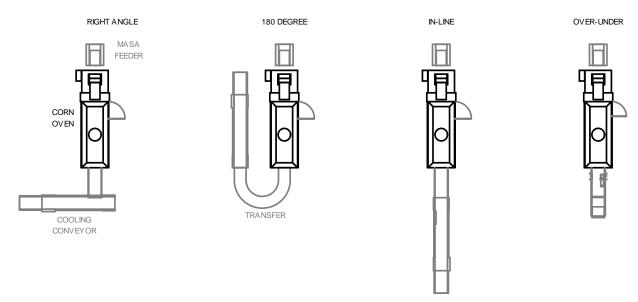

7635 SERAPIS AVE. PICO RIVERA, CALIFORNIA 90660 1(800)944-0396 (562)949-0396 FAX (562)949-0180